




บริษัท เทคโนโลยี ฟล็กซ์ จำกัด

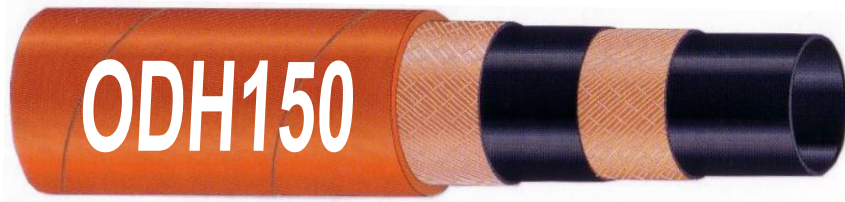

ODH150 OIL DELIVERY HOSE 150 PSI

Used For Delivery And Transfer Of A Wide Range Of Petroleum Products Up To 50% Aromatic Content And Up To Maximum Working Temperature +100°C (+212°F).

Temperature Range : -40°C (-40°F) to +100°C (+212°F)

Tube : Black, Smooth, Nitrile Rubber Compounded

Reinforcement : High Strength Synthetic Cord Plus Anti-Static Copper Wires

Cover : Red, Smooth (Wrapped Finish) High Grade Chloroprene Rubber, Compounded For An Excellent Resistance To Weather., Ozone, Abrasion And Oil.

Coils : 61mt (200ft) Continuous Length; Other Length Available On Request

Branding : White Transfer Tape With Negative Text

ODH150 OIL DELIVERY HOSE WPSI 150'

Part Number	I.D.		O.D.		Working Pressure		Bursting Pressure (Theoretical)		Bending Radius	Hose Weight	
	mm	inch	mm	inch	bar	psi	bar	psi	mm	kg/m	lbs/ft
ODH150-0100	25	1	36.5	1-13/32	10	150	30	450	250	0.82	0.56
ODH150-0125	32	1-1/4	46.0	1-47/94	10	150	30	450	320	1.20	0.82
ODH150-0138	35	1-3/8	48.0	1-57/64	10	150	30	450	350	1.29	0.88
ODH150-0150	38	1-1/2	52.0	2-3/64	10	150	30	450	380	1.38	0.95
ODH150-0163	42	1-5/8	53.0	2-3/32	10	150	30	450	250	1.50	1.00
ODH150-0175	45	1-3/4	60.0	2-23/64	10	150	30	450	450	1.69	1.16
ODH150-0200	51	2	64.0	2-1/2	10	150	30	450	510	1.78	1.22
ODH150-0225	57	2 1/4	70.0	2-49/64	10	150	30	450	530	1.96	1.34
ODH150-0238	60	2 3/8	73.0	2-55/64	10	150	30	450	600	2.06	1.41
ODH150-0250	63	2 1/2	78.0	2-59/64	10	150	30	450	630	2.32	1.59
ODH150-0300	76	3	90.0	3-1/2	10	150	30	450	760	2.75	1.88
ODH150-0350	90	3-1/2	108.0	4 1/4	10	150	30	450	900	3.45	2.36
ODH150-0400	102	4	120.0	4-21/32	10	150	30	450	1020	3.90	2.67
ODH150-0600	152	6	170.0	6-11/16	10	150	30	450	1524	5.05	3.39

*Other size, pressure ratings and colours available on request
A special hose construction, low temperature resistant, is available on request*