




บริษัท เทคโนโลยี เฟล็กซ์ จำกัด

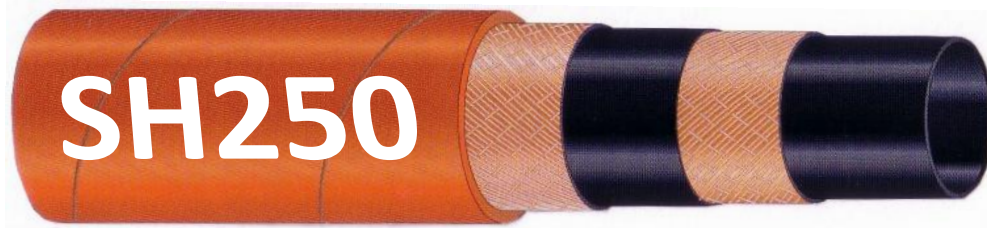

## SH250 STEAM HOSE 250 PSI

Mandrel Built High Pressure Wire Reinforced Steam Hose Designed For Service With Superheated Steam In Heat Control, Fire Prevention etc. In Many Industries At Max Pressure 17 atm (250 PSI).

**Temperature Range** : -40°C (-40°F) to +236°C (+456°F)

**Tube** : Black, Smooth, EPDM Rubber Specially Compounded To Withstand Super Heated Steam

**Reinforcement** : Plies Of Steel Wire Cord

**Cover** : Red, Smooth (Wrapped Finish) EPDM Rubber With Excellent Resistance To High Temperature Weathering, Abrasion And Ageing. It Is Pin-Pricked to Prevent Separation.

**Coils** : 61mt (200ft) Continuous Length; Other Length Available On Request

**Branding** : Red Cover With Embossed Tape

**SH 250 STEAM HOSE WPSI 250 236°C BS 5342 TYPE 2'**

Part Number	I.D.		O.D.		Working Pressure		Bursting Pressure		Bending Radius	Hose Weight	
	mm	inch	mm	inch	bar	psi	bar	psi	mm	kg/m	lbs/ft
SH250-0050	13	1/2	25	1	17	250	170	2500	91	0.53	0.36
SH250-0075	19	3/4	32	1-7/32	17	250	170	2500	133	0.69	0.46
SH250-0100	25	1	39	1-29/64	17	250	170	2500	175	0.9	0.62
SH250-0125	32	1-1/4	46	1-13/16	17	250	170	2500	224	1.30	0.87
SH250-0150	38	1-1/2	54	2-1/8	17	250	170	2500	266	1.60	1.10
SH250-0200	51	2	67	2-41/64	17	250	170	2500	357	2.20	1.51
SH250-0250	63	2-1/2	83	3-5/16	17	250	170	2500	445	3.80	2.61
SH250-0300	76	3	95	3-13/16	17	250	170	2500	532	4.66	3.20
SH250-0400	102	4	124	4-7/8	17	250	170	2500	714	6.50	4.46