


# S CRIMP 420 EVO

ASSEMBLING FOR FIELD REPAIR  
BENCHTOP CRIMP MACHINE

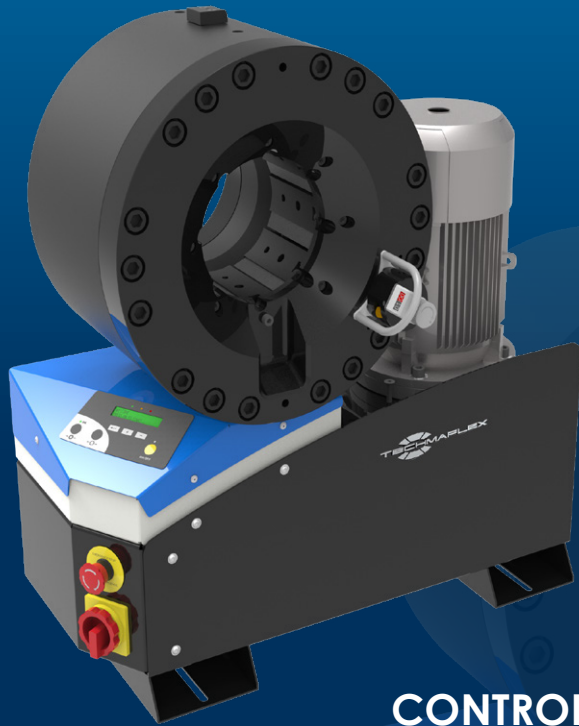

## KEY FEATURES

- High crimping force of 420 tonnes
- Robust design for transport and operation in harsh environments
- Protected cylinders for trouble-free operation in high dust environments
- Large opening suitable for large bore hoses
- Easy maintenance due to foam pads and dust collector
- Model shown equipped with SC control panel

## CONTROL OPTIONS AVAILABLE ON REQUEST



## TECHNICAL SPECIFICATIONS

### CAPACITY\*

6ws: 3" max.  
Industrial: 4" max.

### CRIMP RANGE

4 - 130 mm (0.157 - 5.118")

### CRIMP FORCE

420 t

### OPENING WITH DIES

+48 mm (+1.9 inch)

### COMPLETE OPENING

178 mm (7.0 inch)

### MASTER DIE LENGTH

120 mm (4.724 inch)

### STANDARD DIES

15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51, 57, 62, 66, 70, 73, 76

### NOISE LEVEL

<70 dB A

### MOTOR

5.5 kW

### VOLTAGES

220/240 V, 3Ph, 50 Hz  
380/415 V, 3Ph, 50 Hz  
208/240 V, 3Ph, 60 Hz  
380/415 V, 3Ph, 60 Hz

### DIMENSIONS

765 x 500 x 800 mm  
(30 x 20 x 32")

### PACKAGING

745 x 1150 x 945 mm  
(29 x 45 x 37")

### NET WEIGHT

395 kg (871 lb)

\*Indicative capacities depending on hose and fitting type

## OPTIONAL



Maintenance Kit



Marking Dies



Die Storage Panel



Die Storage Table



Electrical Footswitch



Quick Change Gun



Aluminium Quick Change Gun



Die Sets for Brake & Air Conditioning Hoses



Bluetooth



Die Storage Panel EVO