

S CRIMP 137 EVO


ASSEMBLING FOR FIELD REPAIR
BENCHTOP CRIMP MACHINE



KEY FEATURES

- Crimp force of up to 137 tonnes for hoses up to 1 1/4"
- Easy to use and robust
- Extensive range of dies to suit crimping of hydraulic hoses
- Easy to set up and maintain
- Fast and reliable
- Digital micrometer
- Model shown equipped with SC control panel

CONTROL OPTIONS AVAILABLE ON REQUEST

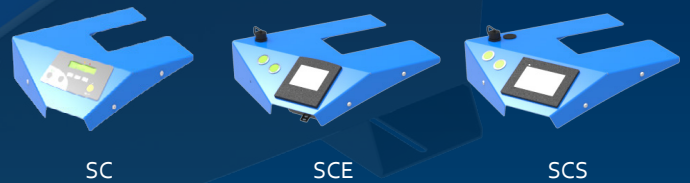

TECHNICAL SPECIFICATIONS

CAPACITY*	NOISE LEVEL
2wb: 1 1/4" max.	70 dB A
4ws: 1 1/4" max.	MOTOR
CRIMP RANGE	4.0 kW
4 - 70 mm (0.157 - 2.756")	VOLTAGES
CRIMP FORCE	220/240 V, 3Ph, 50 Hz
137 t	380/415 V, 3Ph, 50 Hz
OPENING WITH DIES	208/240 V, 3Ph, 60 Hz
+28 mm (+1.102")	380/415 V, 3Ph, 60 Hz
COMPLETE OPENING	Other voltages available on request
100 mm (3.937")	DIMENSIONS
MASTER DIE LENGTH	765 x 400 x 650 mm
75 mm (2.953")	(30 x 16 x 26")
STANDARD DIES	NET WEIGHT
15, 18, 21, 24, 27, 30, 33, 36, 39, 42, 45, 48, 51	160 kg (353 lb)

*Indicative capacities depending on hose and fitting type

OPTIONAL

